

## Active measuring point ASiMA HS IP67

### Function

The PG / Service interface is the feedback-free measuring point for measurements with ASi Scope and can also be used as programming interface.

The ASi measuring point is based on a reusable access technology according to IEC 60352-6 and can be used as distribution of connections or connector. Another advantage of the ASiMA HS is the tool-less mounting on the top-hat rail.

### Technical data


- Voltage: max. 36 VDC
- Total current: max. 4 A
- Isolation voltage: ASi-Power: 200 V

### Contact assignment


- Contact 1: ASi + (brown)
- Contact 2: 0 V (blue)
- Contact 3: ASi - (blue)
- Contact 4: +24 V (brown)
- Contact 5: not used

### General data


- Protection type: IP67
- Mounting: to be snapped on top-hat rail or screwed
- Temperature range: -20 to +60 °C  
(storage temperature -40 to +80 °C)
- Dimensions (HxWxD): 90 x 60 x 40 mm

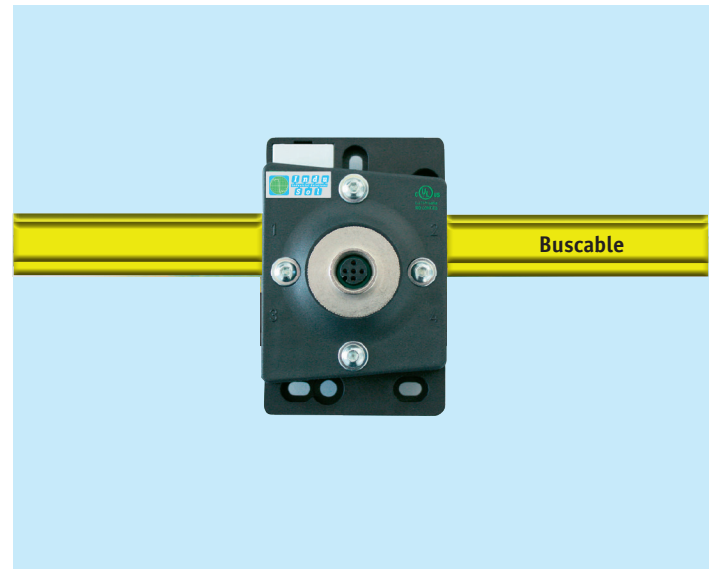

Active measuring point ASiMA HS

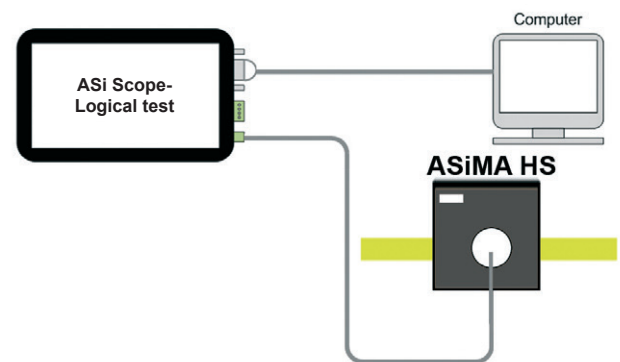

Example of connection

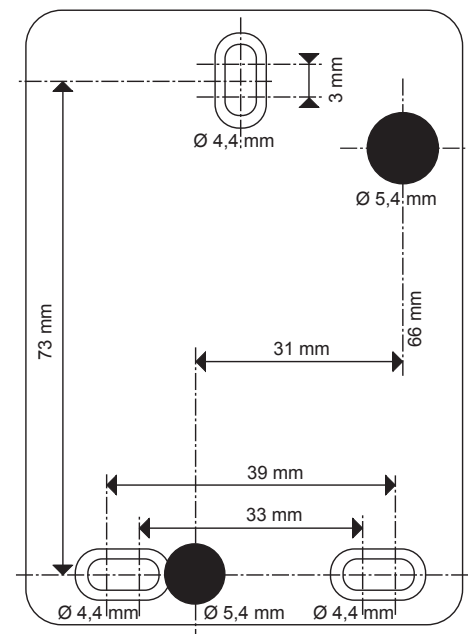

Engineering drawing

### Ordering details

### Art. No.

Active measuring point ASiMA HS

120040001