



Anybus X-gateway - Modbus TCP Client - PROFIBUS Slave

The Anybus X-gateway allows you to seamlessly inter-connect PLC control systems and their connected devices between Modbus TCP and PROFIBUS networks.

FAST COPYING OF I/O DATA

The X-gateways primary function is with the fast transfer of cyclic I/O data between the two networks. This offloads your PLC from working with additional calculations. The gateway acts as a Slave on the PROFIBUS network and as a full Master/Client on the Modbus TCP network. The data transmission between the two networks is completely transparent with a maximum I/O data capacity of 256 bytes in each direction.

EASY CONFIGURATION - NO PROGRAMMING REQUIRED!

Configuration is made via Ethernet and a built-in web page. The configuration page is used to configure Ethernet TCP/IP settings, Modbus TCP client/server configuration and I/O data size transfer between Modbus TCP and the chosen network.



Features and benefits

- Fast copying of cyclic I/O data between a Modbus TCP and a PROFIBUS network (5 ms)
- Allows for the integration of Modbus TCP based server/slave devices into other PLC control systems
- Full Modbus TCP Client/Master functionality, eliminates the need for an PLC controller on the Modbus TCP network
- Connects up to 64 Modbus Servers/Slave devices
- Max I/O data capacity of 256 bytes in each direction
- Possibility to build web pages displaying and controlling a factory floor process with data from the other connected network
- SD memory card slot allows for backup, configuration and easy module replacement
- Robust stand-alone housing for use in harsh industrial environments
- Global free technical support and consultancy

Modbus TCP Client/Master interface

Modbus TCP Client and Server setup is made via an included visual web configuration interface without the need for any programming.


- Modbus TCP Client functionality according to Modbus specification V1.1B
- Support for Modbus TCP functions 1, 2, 3, 4, 5, 6, 15, 16, 23
- Connects up to 64 Modbus TCP servers/slaves
- Supports up to max 256 bytes of Input and 256 bytes of Output data
- 10/100Mbit operation in full or half-duplex
- Integrated FTP server provides easy file management using standard FTP clients
- Web server with dynamic data capability and Server Side Include (SSI) capability
- Email client with dynamic data capability and Event-triggered email handling
- Downlink Live List providing Modbus-TCP transaction status to uplink PLC
- Control and Status words for downlink network control/status
- Individual Modbus TCP server port number setting
- Byte Swap feature

- Full Modbus address range (1-65536)
- Dual Modbus TCP RJ-45 ports available simultaneously

PROFIBUS Slave interface

PROFIBUS Slave settings can be made either via on-board switches, or by importing the provided .GSD file into engineering tool of the controlling PLC.

- Complete PROFIBUS-DP/DPV1 Slave functionality according to extensions of EN 50170
- Supports Class 1 & Class 2 services
- Automatic baudrate detection up to 12Mbit/s
- Max. Cyclic I/O data 244 bytes Input and 244 bytes Output, max 344 bytes total (in+out)
- Acyclic User Parameter data / Diagnostics length - up to 237 bytes
- Supports PROFIBUS features: Sync and Freeze and Watchdog
- PROFIBUS slave settings via on-board switches or via .GSD file
- 1x D-sub 9-pin female PROFIBUS connector

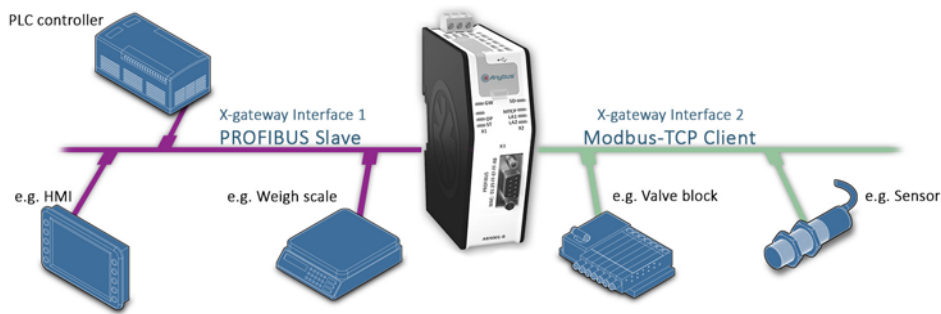

TECHNICAL SPECIFICATIONS

Dimensions (L•W•H)	114 x 44 x 127mm or 4,49 x 1,73 x 5,00"
Weight	400g or 0,880 lbs
Operating temperature	-25 to +65 °C or -13 to +149 °F
Storage temperature	-40 to +85 °C or -40 to +185 °F
Power supply	24 VDC +/- 20% via 2-pole 5.08 mm Phoenix pluggable screw connector
Current consumption	max. 400mA (Typical 200mA)
Enclosure material	Aluminium and plastic
Installation position	Vertical / Flat*
Galvanic isolation	YES, on both BUS/Ethernet side
Mechanical rating	IP20, NEMA rating 1
Mounting	DIN-rail (EN 50022 standard)
I/O configuration	via USB port with Anybus Configuration Manager software
Certifications	CE, CULUS, RoHS

Ordering information

Order Code	AB9001
Included components	Gateway Quick start documentation Connector terminals Power supply not included PLEASE NOTE: SD-card not included. Configuration software is available for download.
Accessories	021520: Wall mount option 021530: SD-memory card (industrial grade)

3 year guarantee. For purchasing instructions and terms and conditions, see: [How to buy](#).

Copyright © 2020 HMS Industrial Networks - All rights reserved.