



Anybus X-gateway - Modbus TCP Client - EtherNet/IP Adapter

The Anybus X-gateway allows you to seamlessly inter-connect PLC control systems and their connected devices between Modbus TCP and Ethernet/IP networks.

FAST COPYING OF I/O DATA

The X-gateways primary function is with the fast transfer of cyclic I/O data between the two networks. This offloads your PLC from working with additional calculations. The gateway acts as an Adapter on the EtherNet/IP network and as a full Master/Client on the Modbus TCP network. The data transmission between the two networks is completely transparent with a maximum I/O data capacity of 256 bytes in each direction.

EASY CONFIGURATION - NO PROGRAMMING REQUIRED!

Configuration is made via Ethernet and a built-in web page. The configuration page is used to configure Ethernet TCP/IP settings, Modbus-TCP client/server configuration and I/O data size transfer between Modbus TCP and the chosen network.



Features and benefits

- Fast copying of cyclic I/O data between a Modbus TCP and an EtherNet/IP network (5 ms)
- Allows for the integration of Modbus TCP based server/slave devices into other PLC control systems
- Full Modbus TCP Client/Master functionality, eliminates the need for an PLC controller on the Modbus TCP network
- Connects up to 64 Modbus Servers/Slave devices
- Max I/O data capacity of 256 bytes in each direction
- Possibility to build web pages displaying and controlling a factory floor process with data from the other connected network
- SD memory card slot allows for backup, configuration and easy module replacement
- Robust stand-alone housing for use in harsh industrial environments
- Global free technical support and consultancy

Modbus TCP Client/Master interface

Modbus TCP Client and Server setup is made via an included visual web configuration interface without the need for any programming.


- Modbus TCP Client functionality according to Modbus specification V1.1B
- Support for Modbus TCP functions 1, 2, 3, 4, 5, 6, 15, 16, 23
- Connects up to 64 Modbus TCP servers/slaves
- Supports up to max 256 bytes of Input and 256 bytes of Output data
- 10/100Mbit operation in full or half-duplex
- Integrated FTP server provides easy file management using standard FTP clients
- Web server with dynamic data capability and Server Side Include (SSI) capability
- Email client with dynamic data capability and Event-triggered email handling
- Downlink Live List providing Modbus-TCP transaction status to uplink PLC
- Control and Status words for downlink network control/status
- Individual Modbus TCP server port number setting
- Byte Swap feature

- Full Modbus address range (1-65536)
- Dual Modbus TCP RJ-45 ports available simultaneously

EtherNet/IP Adapter/Slave interface

EtherNet/IP adapter settings can be made either via the built-in web interface, or by importing the provided .EDS file into engineering tool of the controlling PLC.

- EtherNet/IP CONFORMANCE TESTED™ by ODVA
- EtherNet/IP Level 2 I/O Server CIP
- 10/100Mbit operation in full or half-duplex
- Max. 509 bytes Input and 505 bytes Output data
- Device Level Ring (DLR) functionality available (announce-based ring participant)
- Integrated FTP server provides easy file management using standard FTP clients.
- Web server with dynamic data capability and Server Side Include (SSI) capability
- Email client with dynamic data capability and Event-triggered email handling
- Per-user security framework
- Quality of Service (QoS) available
- DNS Capability
- TCP/IP settings via DHCP/ARP/Anybus IPconfig (HICP)
- Integrated switch allowing for a daisy-chain topology
- 2x RJ-45 EtherNet/IP ports available simultaneously

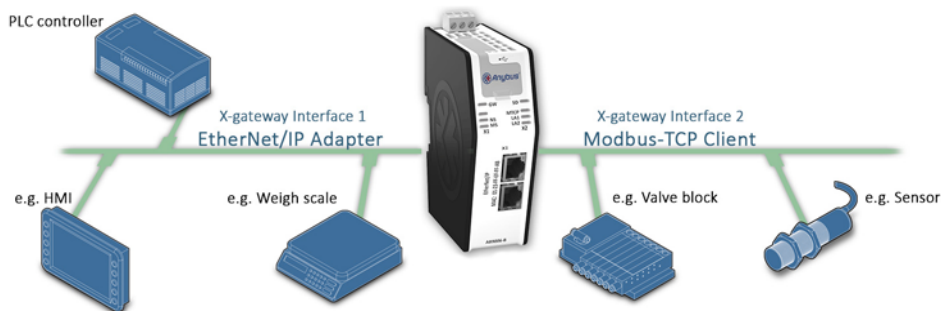

TECHNICAL SPECIFICATIONS

Dimensions (L•W•H)	114 x 44 x 127mm or 4,49 x 1,73 x 5,00"
Weight	400g or 0,880 lbs
Operating temperature	-25 to +65 °C or -13 to +149 °F
Storage temperature	-40 to +85 °C or -40 to +185 °F
Power supply	24 VDC +/- 20% via 2-pole 5.08 mm Phoenix pluggable screw connector
Current consumption	max. 400mA (Typical 200mA)
Enclosure material	Aluminium and plastic
Installation position	Vertical / Flat*
Galvanic isolation	YES, on both BUS/Ethernet side
Mechanical rating	IP20, NEMA rating 1

Mounting	DIN-rail (EN 50022 standard)
I/O configuration	via USB port with Anybus Configuration Manager software
Certifications	CE, CULUS, RoHS

File	Version	Size	Read online
------	---------	------	-------------

Ordering information

Order Code	AB9006
Included components	<p>Gateway Quick start documentation Connector terminals</p> <p>Power supply not included PLEASE NOTE: SD-card not included.</p> <p>Configuration and Anybus OPC server software is available for download.</p>
Accessories	<p>021520: Wall mount option 021530: SD-memory card (industrial grade)</p>

3 year guarantee. For purchasing instructions and terms and conditions, see: [How to buy](#).

Copyright © 2020 HMS Industrial Networks - All rights reserved.