




CAN-CR300

CAN / CAN FD repeater with screw terminals and 4 channels

The CAN-CR300 is used for galvanic isolation of CAN / CAN FD network segments and to design tree or star topologies. As a special feature, the repeater separates a defective segment from the rest of the network, allowing the remaining network to continue working. After the fault has been eliminated, the segment is automatically switched back to the network. The galvanic isolation is provided for the CAN / CAN FD segments as well as for the power supply.

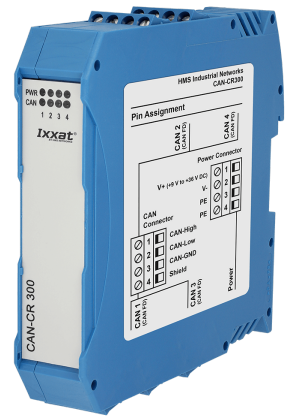

FEATURES AND BENEFITS

- CAN and CAN FD interfaces in one device
- 4 x CAN / CAN FD
- Cost savings due to simple wiring
- Increased system reliability
- Almost no influence on real-time behavior

CONTENTS OF DELIVERY

- CAN-CR300
- User manual

TECHNICAL SPECIFICATIONS

Display	Transmit and defective segment (four duo LEDs, one for each segment), Power (one LED)
CAN bus interface	ISO 11898-2 with CAN choke. Two screw terminals. Available with and without integrated CAN termination.
CAN bitrates	Up to 1 Mbit/s
CAN FD bus interface	ISO CAN FD and nonISO CAN FD
CAN FD bitrates	Arbitration rate up to 1000 kBit/s, data rate up to 8000 kbit/s. The data rates are verified by tests. User-defined bit rates are possible. Attention: The maximum data rate can be exceeded depending on the concrete operating conditions (cable length, settings made, remote stations,...), but it can also not be reached.
Delay	typ. 175 ns (corresponds to ~35 m bus length)
Power supply	9-36 V DC, typ. 90 mA, max. 125 mA, through terminals
Galvanic isolation	1 kV DC / 1 sec, 500 V AC / 1 min; All CAN channels and power supply are galvanically isolated from each other.

Certification	CE, FCC
Temperature range	-20 °C ... +70 °C
Housing, size	Plastic enclosure, 22.5 x 105 x 114 mm

Order number

1.01.0210.40000	CAN-CR300, with bus termination resistors
1.01.0210.40200	CAN-CR300, without bus termination resistors

Accessories

Type	Order number	Product image
Sub-D9 Connector with CAN Termination	1.04.0075.03000	
CAN cable	1.04.0076.00180	
Y CAN cable	1.04.0076.00001	
More accessories and detailed information...		

Copyright © 2020 HMS Industrial Networks - All rights reserved.